


Range Chart

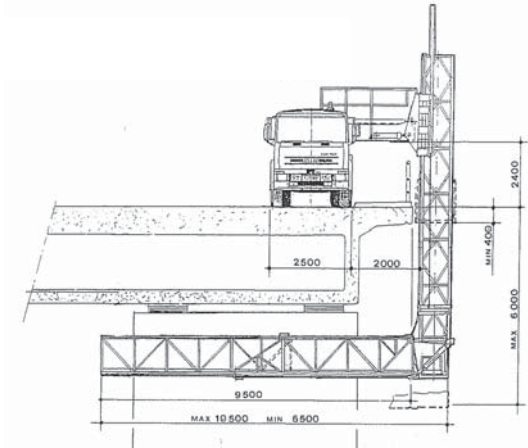

DISTRIBUTED PAYLOAD ON PLATFORM : 500 Kg
CONCENTRATED PAYLOAD AT TIP : 300 Kg

BARIN UNDER-BRIDGE MAINTENANCE

For more information on this equipment or if you require a free onsite inspection, contact our team

136 132

Specifications

Length of platform (closed)	6.50 m
Length of platform (extended)	10.50 m
Width of platform	1.20 m
Space required on bridge	2.50 m
Safe working load	500 kg
Max Load at end of telescopic platform	300 kg
Min Lowering depth	0.40 m
Max Lowering depth	6 m
Rotation of platform	180 °
Travelling length (stowed)	9.10 m
Travelling width (stowed)	2.50 m
Travelling height (stowed)	4 m
Overall weight (approx)	15000 kg
240 volt outlet in basket	