



# YOUR EWVP SOLUTIONS GUIDE

**BOOM** SHERRIN

# At BOOM Sherrin we're much more than just an elevated work platform supplier.

For more than 40 years now we've been offering tailored EWP solutions from a comprehensive equipment fleet Australia-wide; backed by on-call sales and service assistance; reliable solutions and one of the safest working practices in the industry.

## GRADEABILITY CONVERSION

### Gradeability


5%	10%	15%	20%	25%	30%	35%	40%	45%	50%	55%	60%
2.86	5.71	8.53	11.31	14.04	16.70	19.29	21.80	24.23	26.57	28.81	30.96

### Degrees

### PLEASE NOTE

Every effort has been made to accurately specify our equipment in the following pages. Due to availability of equipment actual makes & models supplied may vary from what is indicated. BOOM Sherrin specifies "Working Height" at a standard additional height of 6ft (1.8m) above the manufacturer's specified platform height.

## Range Chart

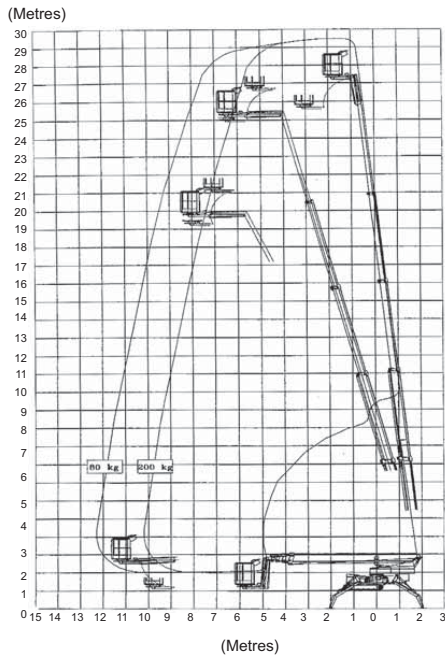

# 30m SPIDER LIFT


For more information on this equipment or if you require a free onsite inspection, contact our team

# 136 132

## Specifications

Maximum working height	29.70 m
Maximum outreach	12.60 m
Maximum basket load	200 kg
Rotation	360 °
Basket size	1.25 x 0.80 x 1.10 m
Turnable basket	41 °
Transport length	8 m
Transport height	1.98 m
Transport width	1.10 m
Operational width	5.30 / 3.45 m
Weight	3775 kg
Gradeability	35 %
Crawler track length	1.74 m
Hydraulic stabilisers	
Proportional controls	
Hydraulic propulsion	
240 volt outlet to basket	
Radio controls and white tracks standard	

## Range Chart

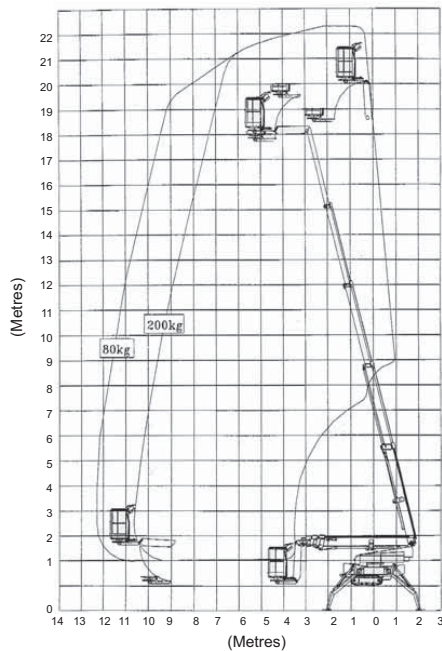

# 22m SPIDER LIFT


For more information on this equipment or if you require a free onsite inspection, contact our team

# 136 132

## Specifications

Maximum working height	22.50 m
Maximum outreach	12.20 m
Maximum basket load	200 kg
Rotation	360 °
Basket size	1.25 x 0.80 x 1.10 m
Turnable basket	41 °
Transport length	6.40 m
Transport height	1.98 m
Transport width	1.10 m
Operational width	4.25 / 3.45 m
Overall weight (approx)	3050 kg
Gradeability	40 %
Crawler track length	1.42 m
Hydraulic stabilisers	
Proportional controls	
Hydraulic propulsion	
240 volt outlet to basket	
Radio controls and white tracks standard	

## Range Chart

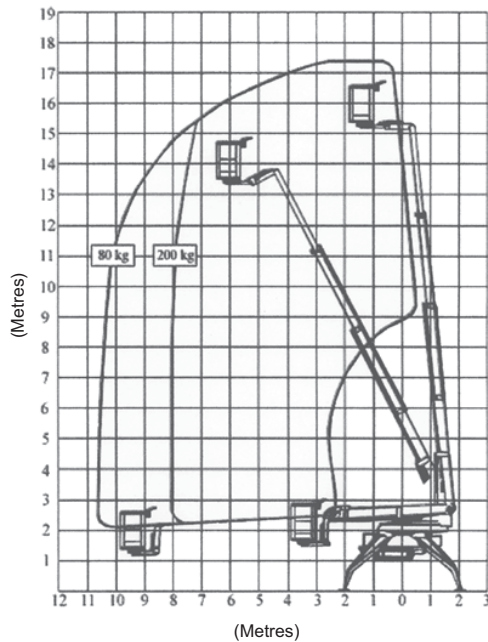

# 17m SPIDER LIFT

For more information on this equipment or if you require a free onsite inspection, contact our team

# 136 132

## Specifications

Maximum working height	17.20 m
Maximum outreach	10.40 m
Maximum basket load	200 kg
Rotation	360 °
Basket size	1.25 x 0.80 x 1.10 m
Turnable basket	41 °
Transport length	5.80 m
Transport height	1.98 m
Transport width	1.10 m
Operational width	4.25 / 3.45 m
Overall weight (approx)	2800 kg
Gradeability	40 %
Crawler track length	1.42 m
Hydraulic stabilisers	
Proportional controls	
Hydraulic propulsion	
240 volt outlet to basket	
Radio controls and white tracks standard	



**136 132 BOOM SHERRIN**  
[www.boomsherrin.com.au](http://www.boomsherrin.com.au)